



# Non drill anchor

# NDA




### Description

Non drill drop-in anchors.


Cost effective anchor without ETA approval for fixing in non-structural systems.

Available for 6 mm, 8 mm, 10 mm, and 12 mm threadings.

Manufactured from zinc plated steel.



### Dimensions

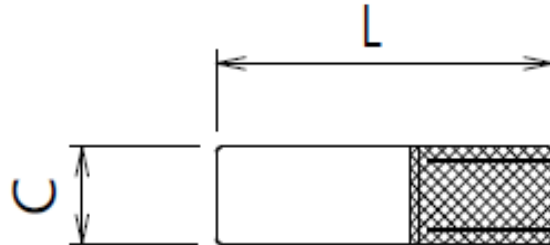

Size / D	L	C	Hole Size	Thread Length
M6	25	7.7	8.0	9.8
M8	30	9.8	10.0	13.5
M10	40	11.8	12.0	17.4
M12	50	16.7	17.0	19.2

### Material

Steel Chemistry

C: 7%  
 Si: 19%  
 Mn: 39%  
 S: 18%  
 P: 19%

Appearance: ZP-CR3

### Quality

Pull Stress

M8: 11.494.99N  
 M10: 16.133.98N  
 M12: 24.843.97N