


# Non-insulated flexible duct

# FLD



## Dimensions

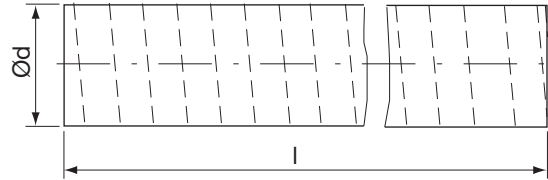

### Description

Multiple layer product made up of aluminium/PET laminate formed into a flexible duct supported by a bronze coated wire helix.

### Classification

M1

### Technical data

Duct materials .....	Aluminium/PET laminate Fire retardant adhesive Bronze coated bead wire
Temperature range .....	-30 to +140°C
Maximum air velocity .....	30 m/s
Packing .....	Individual box

Ød nom	O πd m	A πd <sup>2</sup> /4 m <sup>2</sup>	l [mm]	Max. pressure Pa
80	0,251	0,005	10000	+3000
100	0,320	0,008	10000	+3000
125	0,399	0,013	10000	+3000
150	0,478	0,018	10000	+3000
160	0,509	0,021	10000	+3000
180	0,565	0,025	10000	+3000
200	0,638	0,032	10000	+3000
224	0,707	0,040	10000	+3000
250	0,798	0,051	10000	+3000
315	0,990	0,078	10000	+3000
400	1,28	0,129	10000	+3000

### Ordering example

