




Insulation Materials

IH45/IH62

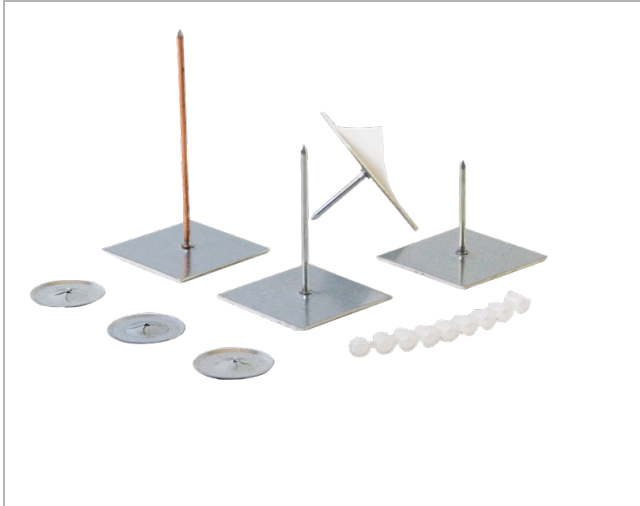

Description

Self-adhesive hangers are designed to fix efficiently insulation on smooth surfaces such as air ducts. It consists of a pin, firmly crimped on a high quality self-adhesive base.

Locking washers supplied in each box.

Storage- 2 years when stored in a dry place. +10°C to +30°C (+50°F to +90°F), with 50% relative humidity.

Application

Quantity	8 to 12 hangers per square meter (1,20 sq Yd) are required in standard condition.
Application	* Surfaces should be clean and dry, free of dust, grease, oil and any other loose matter. * Avoid to use degreasing - products * Not for use in application likely to make contact with chlorinated, cetonic or esther solvents
Application temperature	+15 °C to +25 °C (+60°F to +77°F)
Holding temperature	-40 °C to +80 °C (-40°F to +176°F)

Dimensions

Shank	Material	Up to 63 mm length (2-1/2") galvanized steel
		From 76 mm length (3") copper plated steel
	Diameter	
	Lengths	19 to 400 mm (3/4" to 16")

Locking washers

	IH	
	CL-2-30	CL-2-40
Material	Galvanized spring steel	
Diameter	30 mm (1-3/16") supplied as standard	38 mm (1-1/2") supplied on request
Thickness	0,35 mm (29 ga.)	



Insulation Materials

IH45/IH62


Application



Apply at temperature range +15°C to +25°C (+60°F to +77°F). Surfaces should be clean and dry, free of dust, grease, oil and any other loose matter. Do not use degreasing products. Not for use in application likely to make contact with chlorinated, cetonic or esther solvents.




Remove the protective release paper taking care not to touch the adhesive



Place the hanger in the required position and press the base against the surface to be insulated



Insulation can be impaled immediately but maximum strength of adherence is achieved after 24 hours.



If necessary, cover the pin with protective cap.